


EAN: 4015474259744
static.hansa.com/090522830037

- Washbasin
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- Standard aerator
- Hot/Cold symbols, Single operating lever/handle
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- \varnothing 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Rapid installation system
- Without pop-up waste

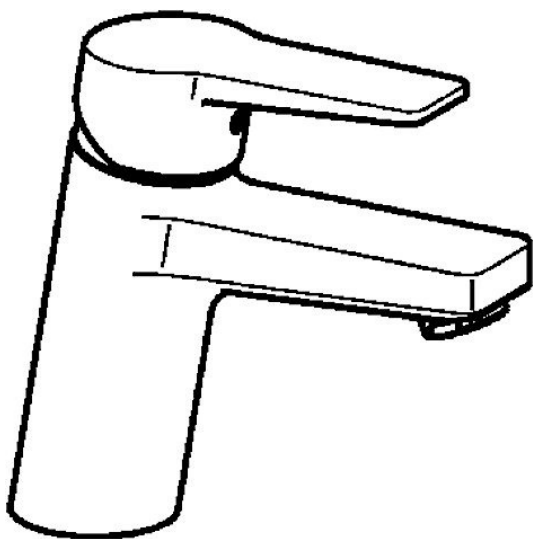

Technical data

Flow properties

| | |
|-------------------------------------------|------------------|
| Flow-rate at 3 bar (with flow controller) | 6.0 l/min |
| Pressure loss with flow (0.1 l/s) | 2 bar |

Technical properties

| | |
|------------------------------|-------------------|
| DN-size (nominal dimension) | DN15 |
| Hot water supply | max. +70°C |
| Working pressure | 1-10 bar |
| Connection size | G1/2 |
| Projection | 121 mm |
| Backflow prevention (EN1717) | AA |

Regulations

| | |
|-------------|---------------|
| EN standard | EN 817 |
|-------------|---------------|

Approvals and Declarations

| | |
|---------------------------|------------------|
| Declaration of conformity | DoC |
| EPD | S-P-06391 |

Sustainability

| | |
|-------------------------------|----------------|
| EPD module A1 (kg CO2 eq.) | 6,35 |
| EPD module A2 (kg CO2 eq.) | 0,30 |
| EPD module A3 (kg CO2 eq.) | 0,60 |
| EPD module A1-A3 (kg CO2 eq.) | 7,26 |
| EPD module A4 (kg CO2 eq.) | 0,20 |
| EPD module B7 (kg CO2 eq.) | 1854,00 |
| EPD module C2 (kg CO2 eq.) | 0,01 |
| EPD module C3 (kg CO2 eq.) | 0,01 |
| EPD module C4 (kg CO2 eq.) | 0,05 |
| EPD module D (kg CO2 eq.) | -5,16 |

