



EAN: 4015474277335  
[static.hansa.com/41909272](https://static.hansa.com/41909272)



- Public & Semi-public
- Touchless, Battery-operated, Thermostatic, Trim Kit
- Concealed wall mounting
- Chrome
- Temperature control handle
- Safety stop against scalding at 38°C
- Thermostatic cartridge for automatic temperature control
- Solenoid valve, Infrared sensor, Autofocus infrared sensor, Low battery indicator
- Software settings adjustable via magnetic key
- Square rosette

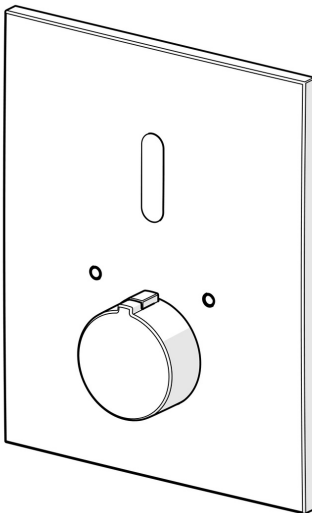

## Technical data

### Flow properties

Flow-rate at 3 bar **12.0 l/min**

### Technical properties

Hot water supply **max. +70°C**  
 Working pressure **0.5-10 bar**

### Software settings

Afterflow period **5 s**  
 Max. flow period **5 min**

### Electronic properties



Battery **Lithium 2CR5 6 V**

### Regulations

EU Directives **CE EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU**  
 EN standard **EN 1111, EN 15091, ETSI EN 301 489-1 V1.9.2, ETSI EN 300 328 v2.2.2, EN 61000-6-1:2007, EN 61000-6-3:2007+A1:2011+AC:2012, EN 60335-1:2012+A11+A13+A14+A14+A2+A15:2021, Part 19.11.4**  
 Protection class **IP 55**

### Approvals and Declarations

UN38.3 **UN38-3 Maxell 2CR5**  
 Declaration of conformity **EMC**

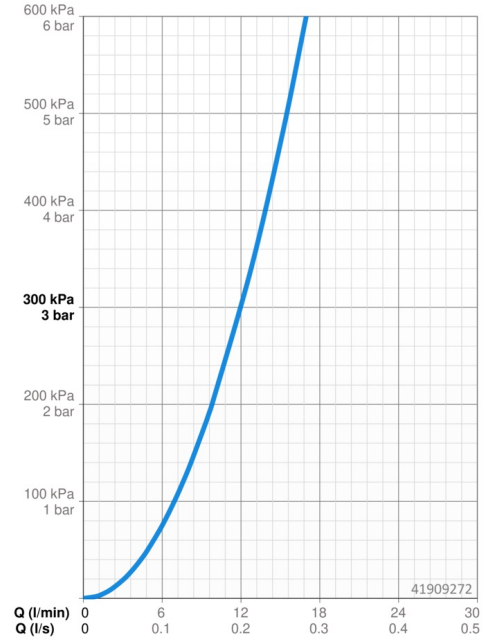

## Spare parts

---

### SP41909272

---

	<b>Name</b>	<b>Code</b>
1	Temperature control handle	59914120
2	Fixing screw	59914254
3	Sensor, 6 V /72 h	59914256
4	Battery, 2CR5 6 V	59911670
5	Battery casing	59914154

