

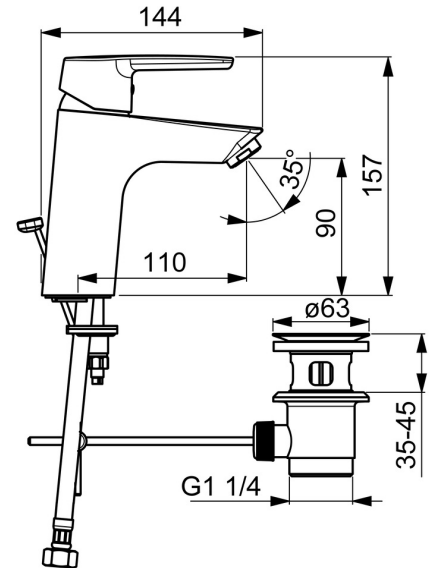


EAN: 4057304004001  
[static.hansa.com/5150229300676](http://static.hansa.com/5150229300676)

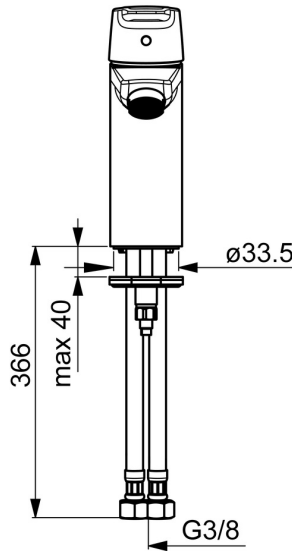

- Washbasin
- Single-lever, Cold Start
- Deck mounted
- Chrome
- Fixed spout
- PCA® - constant flow rate regardless of pressure variations
- Hot/Cold symbols, Single operating lever/handle
- Pop-up waste with draw-rod
- Limitation option for maximum temperature and flow-rate, Energy saving variation (Cold Start) - cold water in the middle position, Adjustable hot water stop (included, retrofittable)
- ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, Rapid installation system

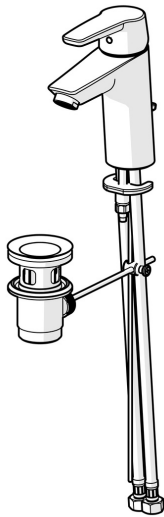

## Technical data

### Flow properties

Eco-flow at 3 bar	<b>4.8 l/min</b>
Flow-rate at 3 bar	<b>12.0 l/min</b>
Flow-rate at 3 bar (with flow controller)	<b>6.0 l/min</b>

### Technical properties

DN-size (nominal dimension)	<b>DN15</b>
Hot water supply	<b>max. +70°C</b>
Working pressure	<b>0.5-10 bar</b>
Connection size	<b>G3/8</b>
Projection	<b>110 mm</b>
Backflow prevention (EN1717)	<b>AA</b>
Material	<b>Brass</b>

### Regulations

EN standard	<b>EN 817</b>
Noise class	<b>I (ISO3822)</b>

### Approvals and Declarations

KIWA	<b>K6116/08</b>
ABP	<b>P-IX 38812/1A</b>
Declaration of conformity	<b>DoC</b>
EPD	<b>S-P-06391</b>

