

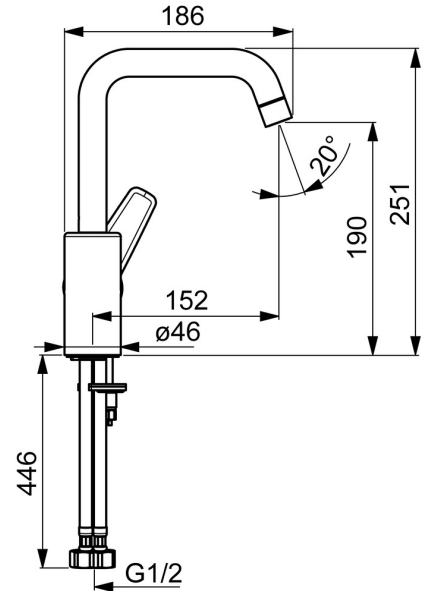


EAN: 4057304004216  
[static.hansa.com/515422930037](http://static.hansa.com/515422930037)

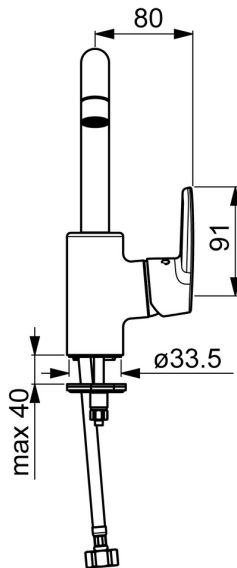

- Washbasin
- Single-lever, side operated
- Deck mounted
- Chrome
- Swivel spout
- PCA® - constant flow rate regardless of pressure variations
- Hot/Cold symbols, Single operating lever/handle
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- $\phi$  35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, Rapid installation system
- Without pop-up waste, Without draw-rod opening

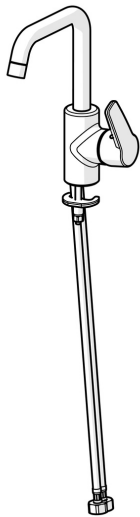

## Technical data

### Flow properties

Flow-rate at 3 bar (with flow controller) **6.0 l/min**

### Technical properties

DN-size (nominal dimension) **DN15**  
 Hot water supply **max. +80°C**  
 Working pressure **0.5-10 bar**  
 Connection size **G1/2**  
 Projection **152 mm**  
 Backflow prevention (EN1717) **AA**  
 Material **Brass**

### Regulations

EN standard **EN 817**  
 Noise class **I (ISO3822)**

### Approvals and Declarations

Declaration of conformity **DoC**

