


52552267 HANSAVANTIS - Washbasin faucet

EAN: 4057304017216 <u>static.hansa.com</u>/52552267




Easy to install with the 3S installation system. High quality Sleek design Made in Europe

Washbasin faucet with maximum comfort

- Washbasin
- Single-lever, side operated
- Deck mounted
- Chrome
- Swivel spout
- PCA® constant flow rate regardless of pressure variations •
- Single operating lever/handle, Pin shape, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- ø 30 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass
- Without pop-up waste



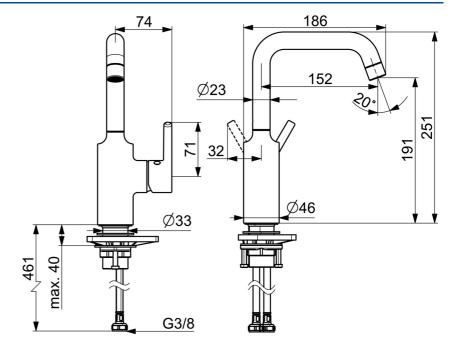





Technical data

F	ow	pro	per	ties
---	----	-----	-----	------

Flow-rate at 3 bar (with flow controller)	6.0 l/min	
Technical properties		
Hot water supply	max. +70°C	
Working pressure	0.5-10 bar	
Connection size	G3/8	
Projection	152 mm	
Backflow prevention (EN1717)	AA	
Material	Brass	
Regulations		
EN standard	EN 817	
Noise class	I (ISO 3822)	
Approvals and Declarations		
Declaration of conformity	DoC	
EPD	S-P-06391	

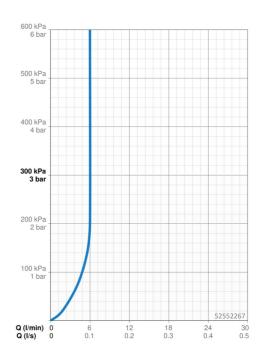

Spare parts

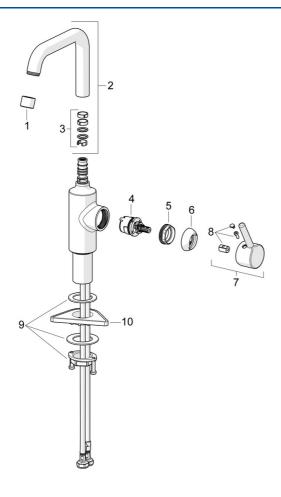

SP52552267

	Name	Code
01	Aerator, M22x1 STD HC PCA, 6 l/min	59914428
02	High spout	1012809V
03	Sealing kit for spout	59914266
04	Cartridge, 3.0	1014428V
05	Tightening nut, M34x1.5	1012133V
06	Covering cap	1012132V
07	Lever	1001749V
08	Symbol plug	1012105V
09	Fixing set	59913479
10	Supporting plate	59910008