


EAN: 4057304019906
static.hansa.com/5421220933

Introducing the HANSAVANTIS Style Kitchen Faucet, designed to elevate the look of any modern kitchen. The matte black finish adds sophistication, while the swivel spout and single operating lever make it easy to use. The faucet is energy-efficient and comes with Bluetooth® control. Made with an inner body of DZR brass, this faucet is built to last. Upgrade your kitchen with this smart and stylish faucet today.



- Kitchen
- Hybrid, Plug transformer, Bluetooth®
- Deck mounted
- Matt black
- Swivel spout
- Standard aerator
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- \varnothing 30 mm ceramic eco cartridge for flow and temperature control
- Advanced PSD sensor, Solenoid valve, Power supply
- Flexible inlet pipes
- Inner body made of DZR brass

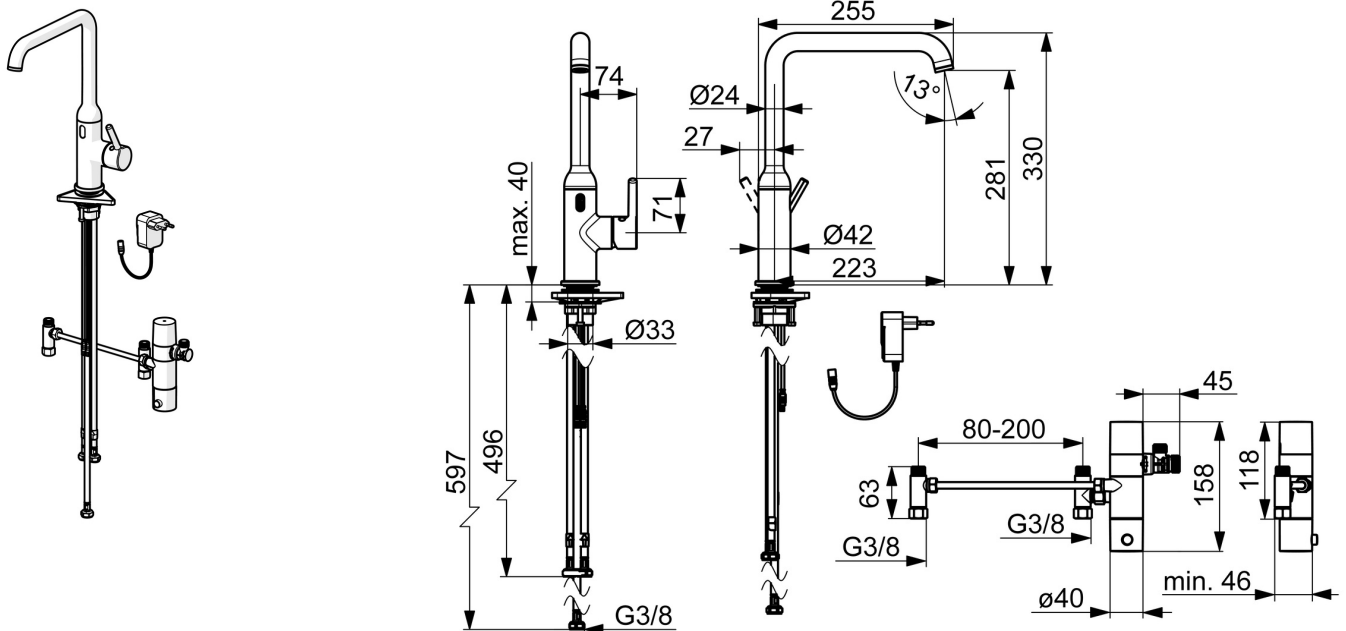

Technical data

Flow properties

Flow-rate at 3 bar **10.8 l/min**

Technical properties

Hot water supply **max. +70°C**
 Working pressure **0.5-10 bar**
 Connection size **G3/8**
 Projection **255 mm**
 Backflow prevention (EN1717) **EB**
 Material **Brass**

Software settings

Automatic flush **30 s (1-1800 s)**
 Automatic flush period **30 s (1-1800 s)**
 Max. flow period **10 s (1-1800s)**

Electronic properties

Electrical Connection **230 / 9 V**
 Bluetooth version **5.x (D060576)**

Regulations

EU Directives **C € Radio Equipment Directive 2014/53/EU , Low Voltage Directive 2014/35/EU , EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU**


EN standard **ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A14+A2+A15:2021, Part 19.11.4**

Noise class **I (ISO 3822)**


Protection class **IP 55 / transformer IP 20**

Approvals and Declarations

Declaration of conformity **RED**
 EPD **S-P-07817**

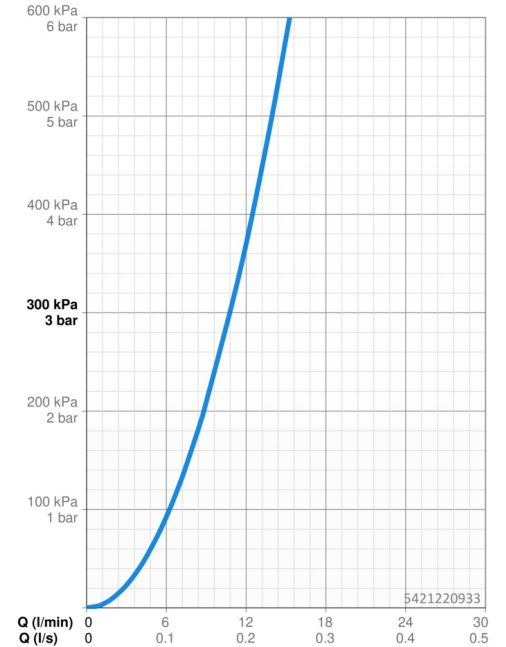

Spare parts

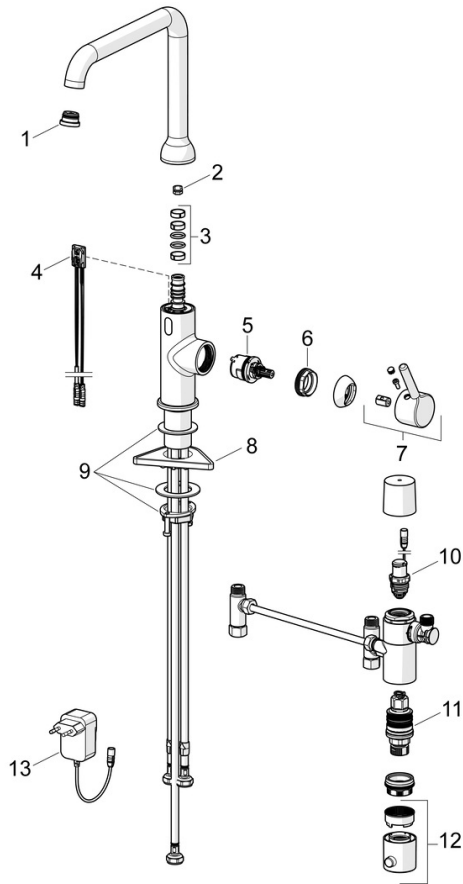

SP5421220933

	Name	Code
01	Aerator and key, Cascade SLC TJ A Matt black	1014808V-33
02	Spout overturning stopper, 60° / 0°	59914264
02	Spout overturning stopper, 120° Discontinued	59914429
03	Sealing kit for spout	59914431
04	Sensor, 3/9 V, Bluetooth	1014212V
05	Cartridge, 3.0	1014428V
06	Tightening nut, M34x1.5	1012133V
07	Lever Matt black	1001749V-33
08	Supporting plate	59910008
09	Fixing set	59913371
10	Pilot valve, 3 V	59914338
11	Thermostatic cartridge, 3.4	59914114
12	Temperature control handle	602062V
13	Power supply, 230/9 V, 550 mA	64490900