



EAN: 4057304021152
static.hansa.com/5540220300006

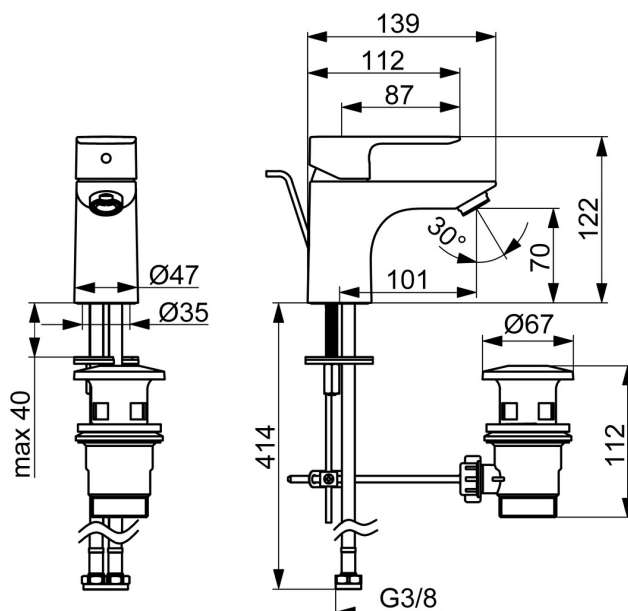

Timeless choice for every modern bathroom. Introducing the universal HANSABASIC washbasin faucet. With a chrome finish and single operating lever, this deck-mounted faucet adds a modern touch to any washbasin. The fixed spout with hot and cold symbols are made for effortless use, while the rapid installation system ensures quick and easy installation. It comes with a classic design and very good price performance. Choose the BASIC line for daily enjoyment in everyday use.

- Washbasin
- Single-lever, Cold Start
- Deck mounted
- Chrome
- Fixed spout
- PCA® - constant flow rate regardless of pressure variations
- Hot/Cold symbols, Single operating lever/handle
- Pop-up waste with draw-rod
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable), Energy saving variation (Cold Start) - cold water in the middle position
- ø 35 mm ceramic eco cartridge for flow and temperature control
- Flexible inlet pipes
- Rapid installation system

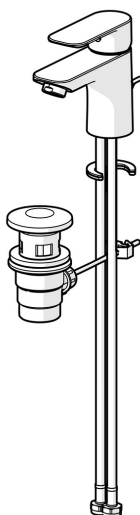

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

4.8 l/min

Technical properties

DN-size (nominal dimension)

DN15

Hot water supply

max. +70°C

Working pressure

0.5-10 bar

Connection size

G3/8

Projection

101 mm

Backflow prevention (EN1717)

AA

Material

Brass

Regulations

EN standard

EN 817


Noise class

I (ISO 3822)


Approvals and Declarations

Declaration of conformity

DoC

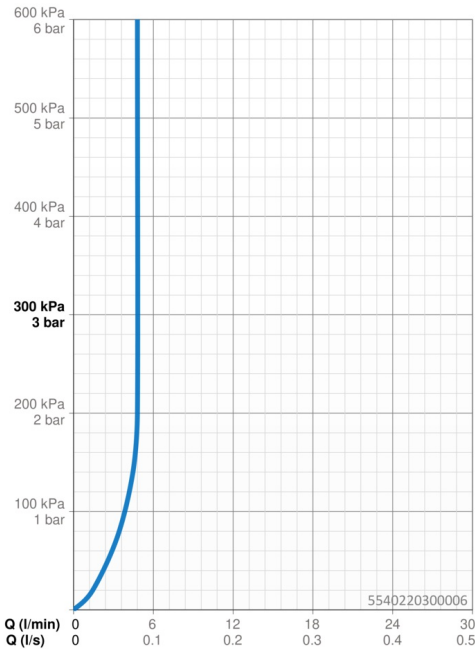

Spare parts

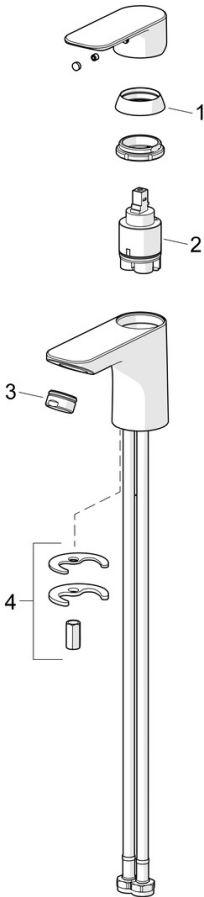

SP5540220300006



	Name	Code
01	Covering cap	1017127V
02	Cartridge, 3.5 cold start	59913953
03	Aerator, M24x1, 6 l/min	59913727
04	Fixing set	1017128V

EAN: 4057304021169
static.hansa.com/5550220300006



Timeless choice for every modern bathroom. Introducing the universal HANSABASIC washbasin faucet. With a chrome finish and single operating lever, this deck-mounted faucet adds a modern touch to any washbasin. The fixed spout with hot and cold symbols are made for effortless use, while the rapid installation system ensures quick and easy installation. It comes with a classic design and very good price performance. Choose the BASIC line for daily enjoyment in everyday use.

- Washbasin
- Single-lever, Cold Start
- Deck mounted
- Chrome
- Fixed spout
- PCA® - constant flow rate regardless of pressure variations
- Hot/Cold symbols, Single operating lever/handle
- Pop-up waste with draw-rod
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable), Energy saving variation (Cold Start) - cold water in the middle position
- ø 35 mm ceramic eco cartridge for flow and temperature control
- Flexible inlet pipes
- Rapid installation system

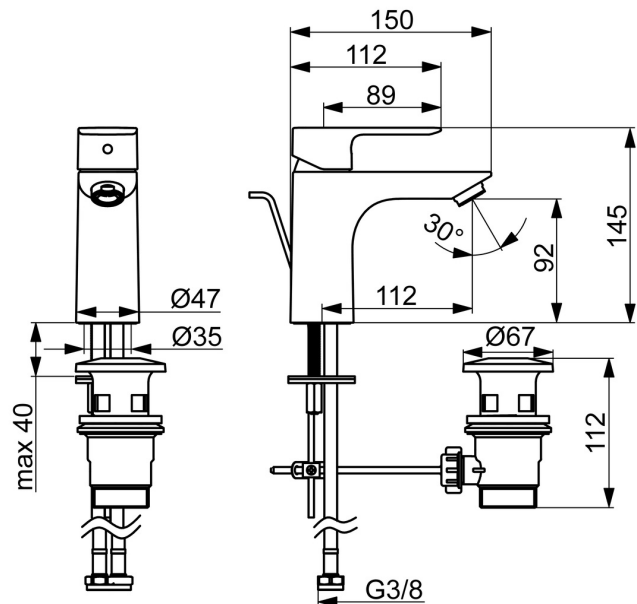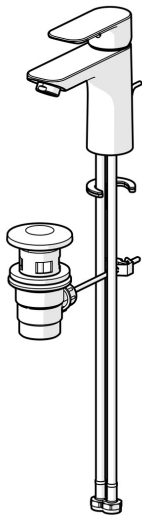

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

4.8 l/min

Technical properties

DN-size (nominal dimension)

DN15

Hot water supply

max. +70°C

Working pressure

0.5-10 bar

Connection size

G3/8

Projection

112 mm

Backflow prevention (EN1717)

AA

Material

Brass

Regulations

EN standard

EN 817


Noise class

I (ISO 3822)


Approvals and Declarations

Declaration of conformity

DoC

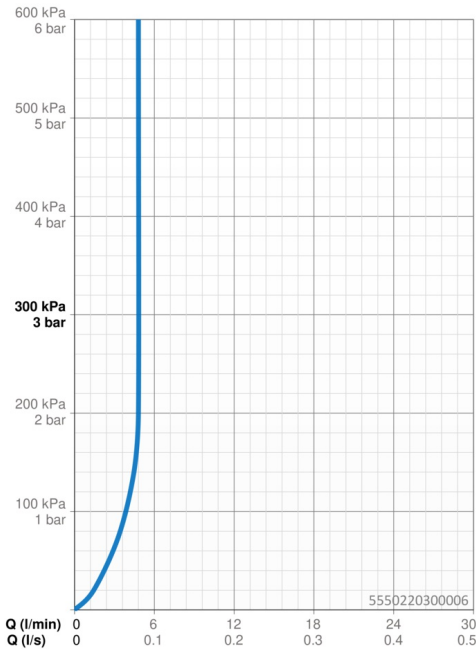

Spare parts

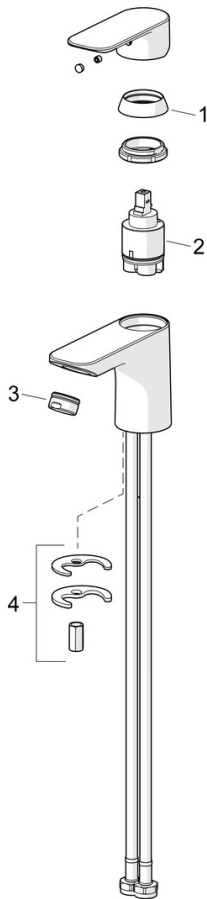

SP5540220300006

	Name	Code
01	Covering cap	1017127V
02	Cartridge, 3.5 cold start	59913953
03	Aerator, M24x1, 6 l/min	59913727
04	Fixing set	1017128V