


55562203 HANSABASIC - Kitchen faucet

EAN: 4057304019081 static.hansa.com/55562203






- Single-lever, side operated
- Deck mounted
- Chrome
- Swivel spout

- Standard aerator
- Hot/Cold symbols, Single operating lever/handle
- ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Rapid installation system



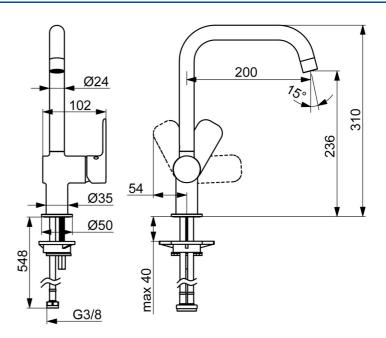



Technical data

| FI | OW | nro | perties |
|----|------|-----|---------|
| ., | .011 | pιυ | perues |

Flow-rate at 3 bar 12.0 l/min

Technical properties

DN-size (nominal dimension)

Hot water supply

Working pressure

Connection size

Projection

Backflow prevention (EN1717)

Material

DN15

max. +70°C

0.5-10 bar

63/8

200 mm

AA

Brass

Regulations


EN standard EN 817
Noise class I (ISO 3822)

Approvals and Declarations


 DVGW
 DW-6506D00165

 ABP
 P-IX 10076/IA

 Declaration of conformity
 DoC

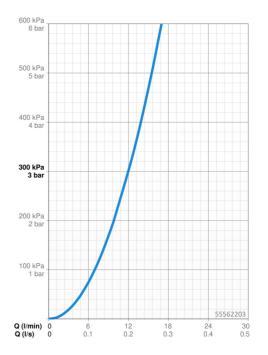

Spare parts

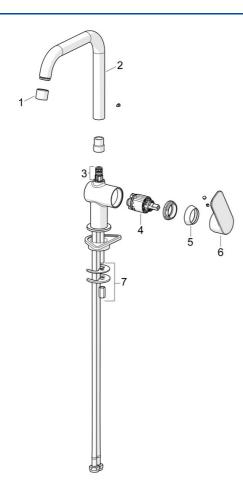

SP55562203

| | Name | Code |
|----|------------------------|----------|
| 01 | Aerator | 1017133V |
| 02 | Spout | 1017132V |
| 03 | Sealing kit | 1017131V |
| 04 | Cartridge, 3.5 Classic | 59913075 |
| 05 | Covering cap | 1017127V |
| 06 | Lever | 1017126V |
| 07 | Fixing set | 1017128V |