

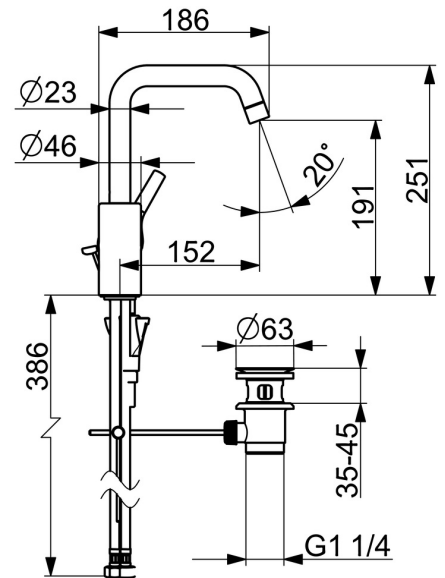


EAN: 4057304012020
static.hansa.com/56372203

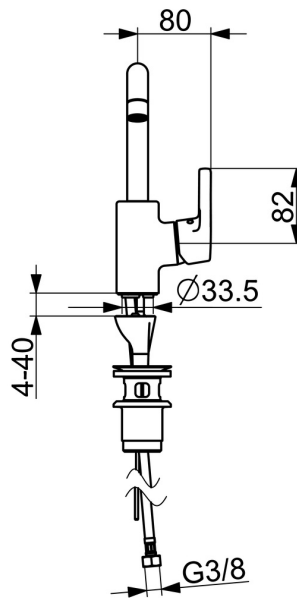

- Washbasin
- Single-lever, side operated
- Deck mounted
- Chrome
- Swivel spout, Swivel range limiting option
- PCA® - constant flow rate regardless of pressure variations
- Hot/Cold symbols, Single operating lever/handle
- Pop-up waste with draw-rod
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- \varnothing 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, 3S-installation system for safe and simple mounting

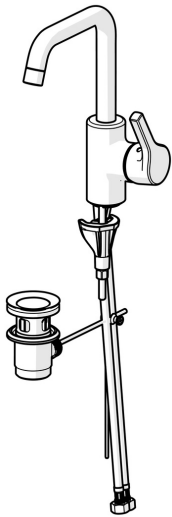

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller) **6.0 l/min**

Technical properties


DN-size (nominal dimension) **DN15**
 Hot water supply **max. +80°C**
 Working pressure **0.5-10 bar**
 Connection size **G3/8**
 Projection **152 mm**
 Backflow prevention (EN1717) **AA**
 Material **Brass**

Regulations


EN standard **EN 817**
 Noise class **I (ISO3822)**

Approvals and Declarations

DVGW **DW-6506CS0548**
 ABP **P-IX 38495/IA**
 Declaration of conformity **DoC**
 EPD **S-P-06391**

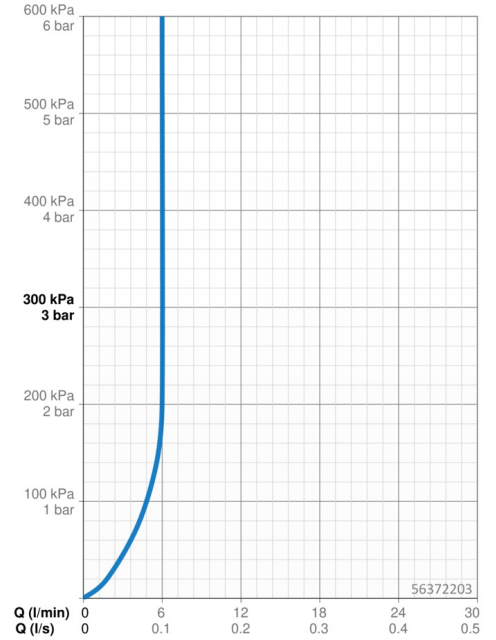

Spare parts

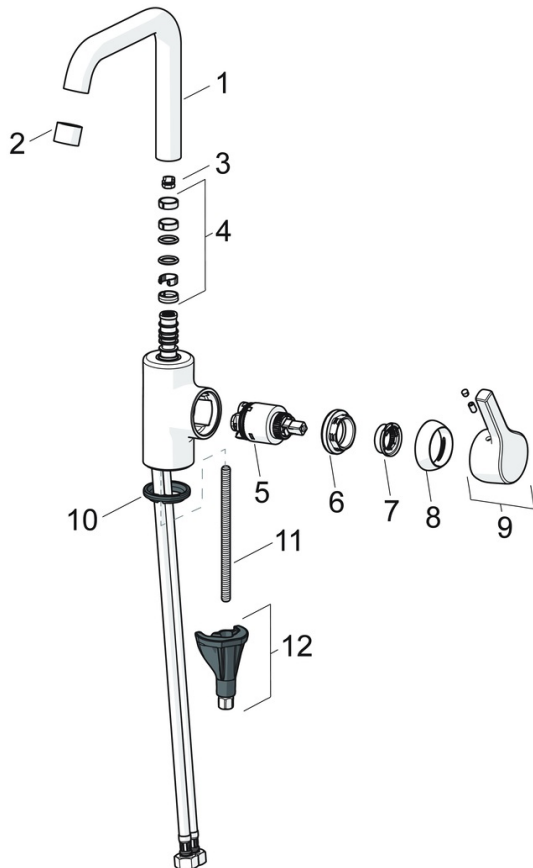

SP56432203

	Name	Code
01	Spout	59914427
02	Aerator, M22x1 STD HC PCA, 6 l/min	59914428
03	Spout overturning stopper, 60° /0°	59914264
03	Spout overturning stopper, 120° Discontinued	59914429
04	Sealing kit for spout	59914431
05	Cartridge, 3.5 Classic	59913075
06	Tightening nut, M40x1	1003409V
07	Temperature adjustment limiter	59912325
08	Covering cap, 33x3 mm	59912504
09	Lever	59914713
10	Bottom seal	59914591
11	Fixing screw, M8x1, L=130	59914474
12	Fixing set	59914475