


- Spare parts
- Autofocus infrared sensor, Low battery indicator

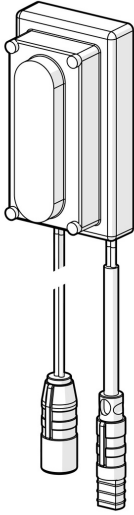

## Technical data

### Software settings

Afterflow period	<b>2 s ± 1 s</b>
Max. flow period	<b>2 min</b>
Opening range	<b>0-5 cm</b>

### Regulations

EU Directives	<b>C € EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU</b>
EN standard	<b>ETSI EN 301 489-1 V1.9.2, ETSI EN 300 328 v2.2.2, EN 61000-6-1:2007, EN 61000-6-3:2007+A1:2011+AC:2012, EN 60335-1:2012+A11+A13+A14+A2+A15:2021, Part 19.11.4</b>
Protection class	<b>IP 67</b>

### Approvals and Declarations

Declaration of conformity	<b>EMC</b>
---------------------------	------------