


- Spare parts
- Autofocus infrared sensor, Low battery indicator

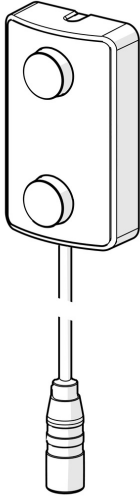

## Technical data

### Software settings

Afterflow period	2 s ± 1 s (1/2/3/4/8 s)
Automatic flush	off (off/12/24/48/72 h)
Automatic flush period	30 s (10/30/60/120/240/300/600 s)
Max. flow period	120 s (10/30/60/120/300 s)

### Regulations

EU Directives	C € EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU
EN standard	ETSI EN 301 489-1 V1.9.2, ETSI EN 300 328 v2.2.2, EN 61000-6-1:2007, EN 61000-6-3:2007+A1:2011+AC:2012, EN 60335-1:2012+A11+A13+A14+A2+A15:2021, Part 19.11.4
Protection class	IP 67

### Approvals and Declarations

Declaration of conformity	EMC
---------------------------	-----