



EAN: 4057304014376
static.hansa.com/6514010133

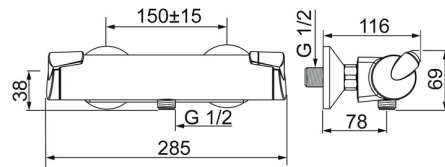

- Shower solutions
- Thermostatic
- Wall mounted
- Matt black
- Temperature control handle, Flow control handle, Easy-Grip surface
- The housing of the fittings conducts minimal heat, Limitation option for maximum temperature and flow-rate, Safety stop against scalding at 38°C
- Thermostatic cartridge for automatic temperature control, Litter filter(s), Ceramic head part for flow control
- Eccentric coupling(s)
- Inner body made of DZR brass
- protected against back-flow in domestic use (according to DIN EN 1717)



Technical data

Flow properties

Eco-flow at 3 bar	12.6 l/min
Flow-rate at 3 bar	16.2 l/min
Pressure loss with flow (0.2 l/s)	1.6 bar

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +80°C
Working pressure	1-10 bar
Connection size	G1/2
Installation width	cc150 ± 15 mm
Backflow prevention (EN1717)	EB
Material	Brass/Plastic

Regulations

EN standard	EN 1111
Noise class	I (ISO 3822) Oras lab.

Approvals and Declarations

Declaration of conformity	DoC
---------------------------	------------

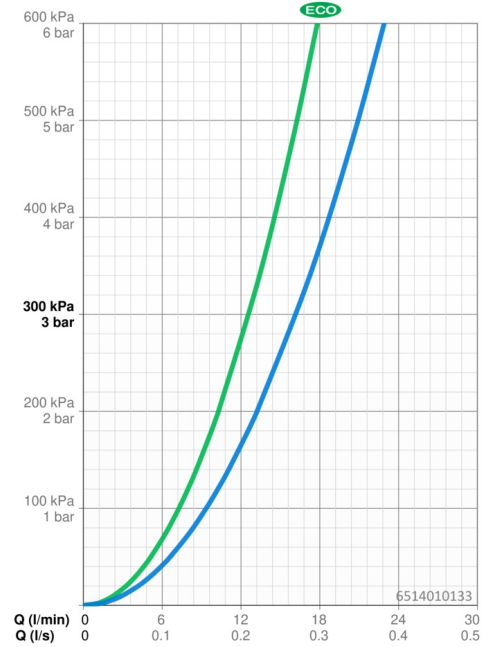

Spare parts

SP6514010133

	Name	Code
01	Headpart, G1/2	59914207
02	Filter sealing, G3/4	59911076
03	Thermostatic cartridge, 3.4	59914114
04	Tightening nut, M36x1.5, SW38	59914319

