



EAN: 4015474269064
static.hansa.com/49462203

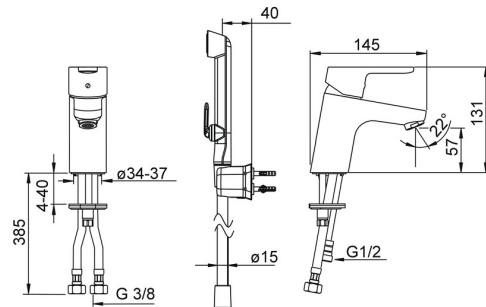

- Washbasin
- Single-lever, Bidetta
- Deck mounted
- Chrome
- Fixed spout
- Standard aerator
- Hot/Cold symbols, Single operating lever/handle
- Hand shower, Shower holder, Shower hose (1600 mm)
- Bidetta hand shower
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- \varnothing 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, Rapid installation system
- Without pop-up waste
- protected against back-flow in domestic use (according to DIN EN 1717)
- 1 spray function

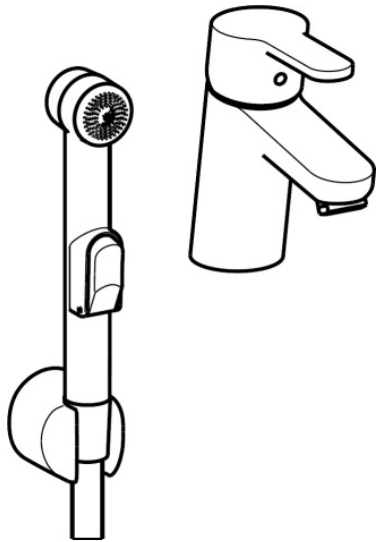

Technical data

Flow properties

Flow-rate at 3 bar	9.0 l/min
Flow-rate at 3 bar (with flow controller)	6.0 l/min
Pressure loss with flow (0.1 l/s)	2 bar

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	1-10 bar
Connection size	G3/8
Projection	107 mm
Backflow prevention (EN1717)	HC
Material	Brass

Regulations


EN standard	EN 817, EN 1113
Noise class	I (ISO 3822)

Approvals and Declarations

Declaration of conformity	DoC
EPD	S-P-06391

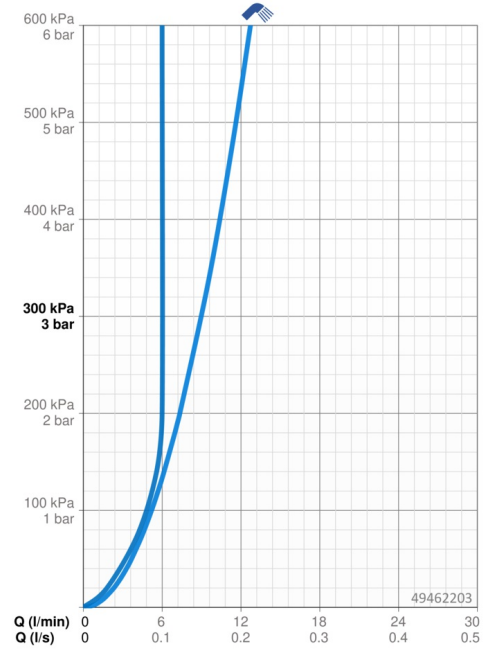

Spare parts

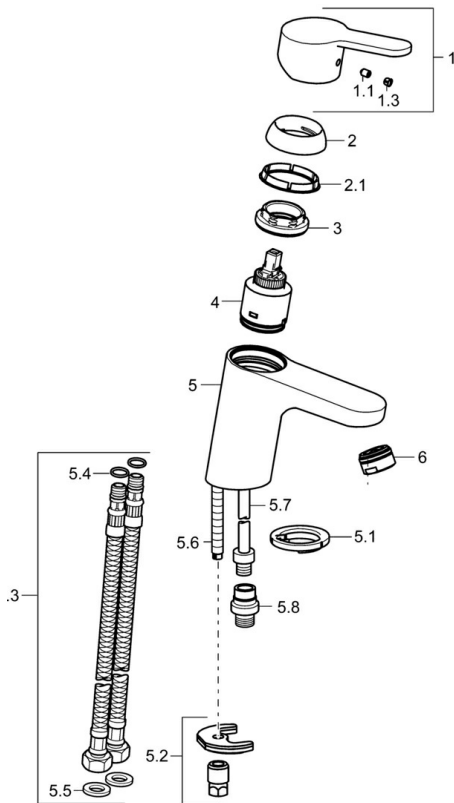

SP49462203

	Name	Code
1	Lever	59913827
1.1	Screw, M5x8, SW2.5	59904755
1.3	Symbol plug Grey	59912112
2	Covering cap, 33x3 mm	59912504
2.1	Gasket, 45x35.5x5.4	59913651
3	Tightening nut, M40x1	1003409V
4	Cartridge, 3.5 Classic	59913075
4	Cartridge, 3.5 Discontinued	59913965
5.1	Bottom seal	59914591
5.2	Fixing set	59912113
5.3	Flexible pipe, L=430, G3/8-M8x1	59913964
5.4	O-ring, 6x1.4	59913266
5.5	Gasket, 9.5x14.4x2	59912551
5.6	Fixing screw, M8x1, L=140	59912474
5.7	Coupling pipe, M8x1-M14x1, L=214 Discontinued	59914035
5.8	Connector, G1/2xM14x1 Discontinued	59914180
6	Aerator, M24x1, 6 l/min	59913727