



EAN: 4015474135802
static.hansa.com/01536176

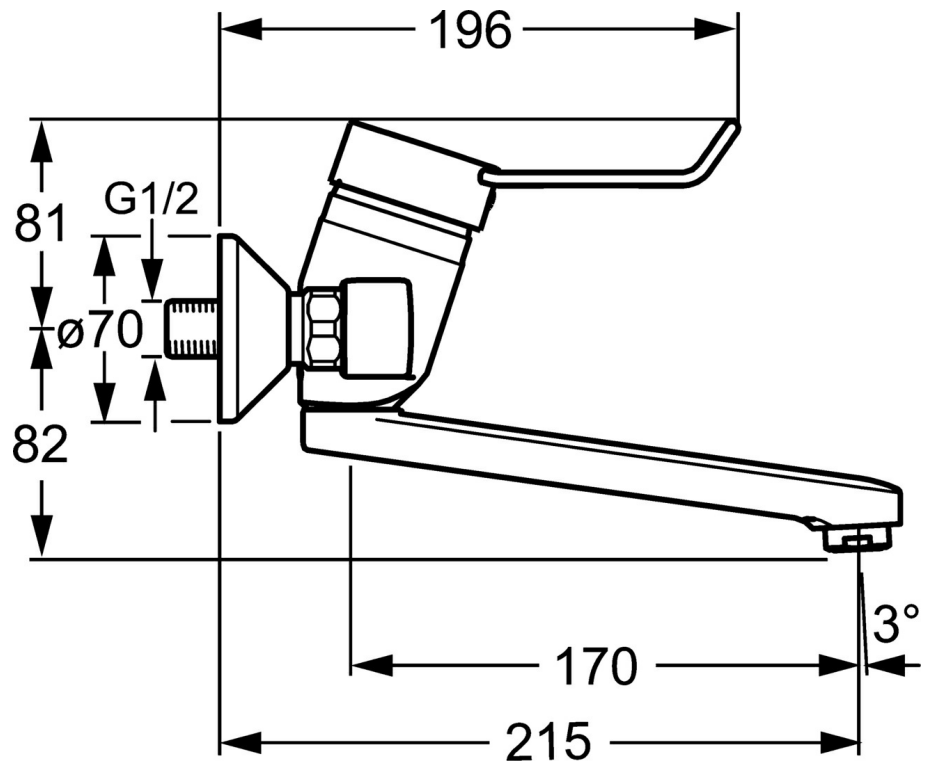

- Health & Care
- Single-lever
- Wall mounted
- Chrome
- Swivel spout, Lockable in the middle position
- Laminar stream
- Single operating lever/handle, Loop shape, Long shape, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 48 mm ceramic eco cartridge for flow and temperature control
- Eccentric coupling(s), Cover plate(s), Silencer(s)
- Inner body made of DZR brass, Waterways without nickel coating

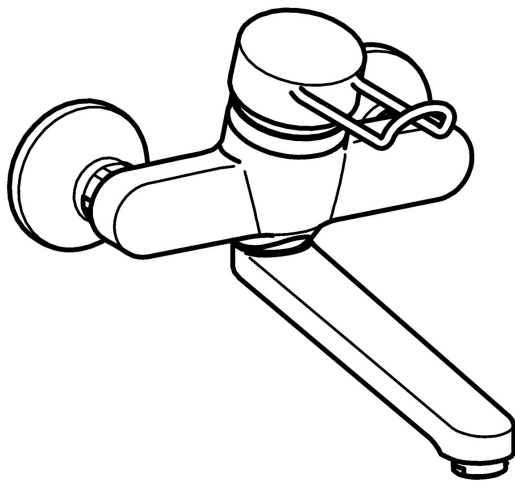

Technical data

Flow properties


Eco-flow at 3 bar	6.0 l/min
Flow-rate at 3 bar	12.0 l/min

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +80°C
Working pressure	0.5-10 bar
Installation width	cc150 ± 20 mm
Projection	215 mm
Material	Brass

Regulations

EN standard	EN 817
Noise class	I (ISO 3822)

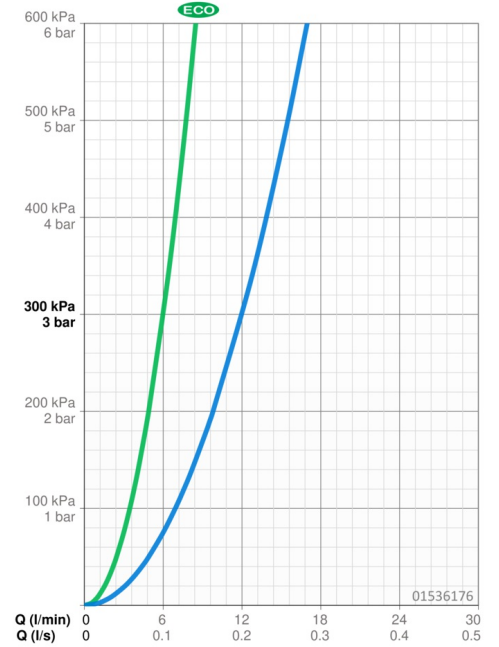

Spare parts

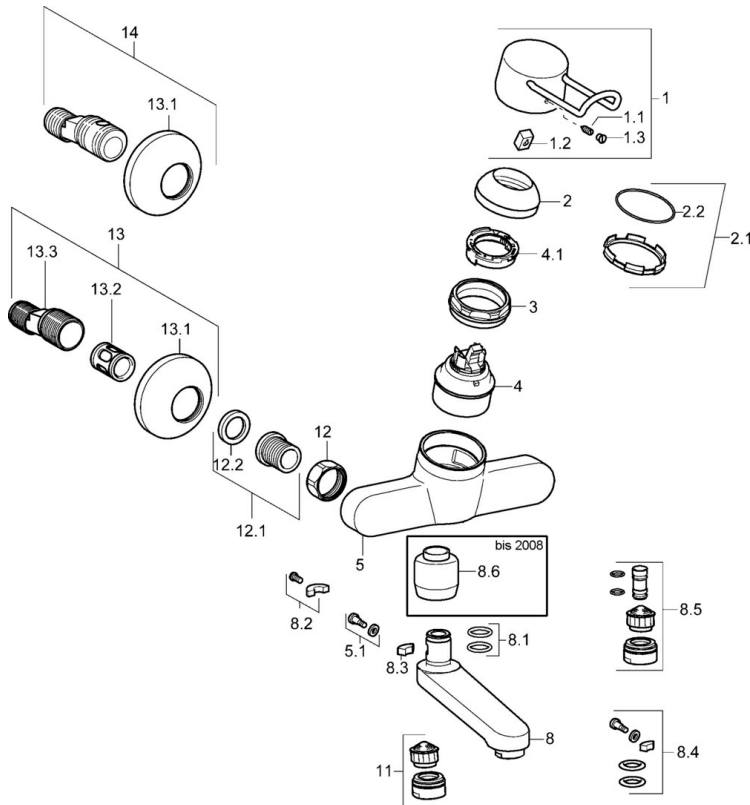

SP01526176

	Name	Code
1	Lever, L=110 Discontinued	01580076
1.1	Screw, M5x8, SW2.5	59904755
1.2	Bushing	59904778
1.3	Symbol plug Grey	59912112
2	Covering cap	59906563
2.1	Clamping ring	59913073
2.2	O-ring, d 46x2	59912470
3	Screw, M50x1, SW45	59913069
4	Cartridge, 4.8 eco	59904601
4.1	Hot water limiter	59904759
5.1	Fixing screw, M6x12, AF2.5	59904804
8	Spout, L=170	59911183
8	Spout, L=96	59910419
8	Spout, L=235	59910417
8	Spout, L=235 (2019-)	59914767
8	Spout, L=96 (2019-)	59914765
8	Spout, L=170 (2019-)	59914766
8	Spout, L=116 Discontinued	59912048
8	Spout, L=145	59911380
8.1	O-ring, d 15x2.5	59910423
8.2	Limiter	59910421
8.3	Limiter	59910422
8.4	Maintenance set	59912230
8.5	Emptying valve	59912483
8.6	Adapter, M18x1 Discontinued	59913074
11	Aerator, M24x1 STD PL HC A Laminar (2013-)	59914054
11	Aerator, M24x1, 7 l/min (-2013) Discontinued	59912004
12	Connection nut, G3/4, AF30	59902230
12.1	Seat, G1/2, L, WAF10	59904618
12.2	Retaining ring, 23.9x15.2x2	59902689
13	Eccentric, G3/4xG1/2	59904793
13.1	Cover flange	59904796
13.2	Silencer	59904792
13.3	Eccentric connector, G3/4xG1/2, DN15	59910254
14	Eccentric coupling with stop valves and cover plates, G1/2xG3/4	59902034
N.I.	Screw, M6x10, 2,5	59911435
N.I.	Key, SW45/SW50	59905190