

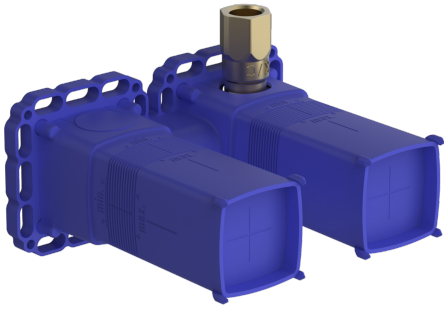


EAN: 4015474202627  
[static.hansa.com/44000000](http://static.hansa.com/44000000)

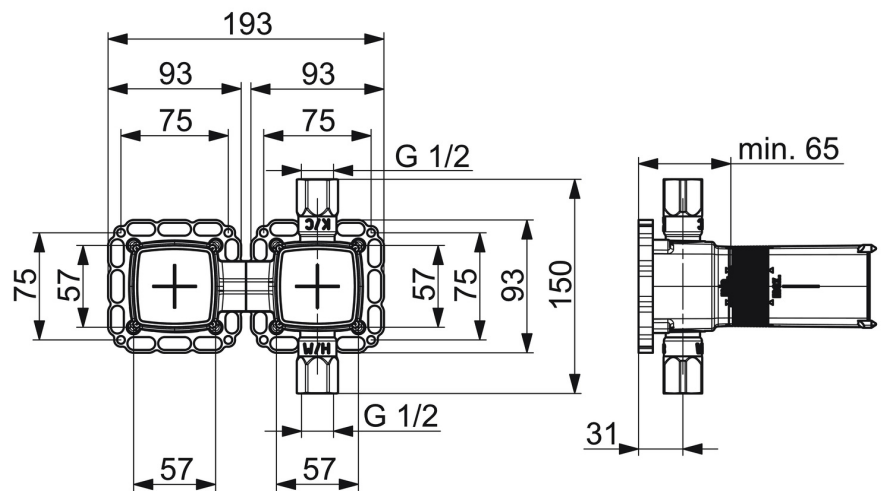

- Washbasin
- Concealed unit
- Concealed wall mounting
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- Pressure plug,  $\phi$  35 mm ceramic cartridge for flow and temperature control
- Internal thread, Silencer(s)
- Inner body made of DZR brass
- Gasket sleeve for dry mortarless construction, Mounting box and cover sleeve, Multifix fastening system, Rotating installation option

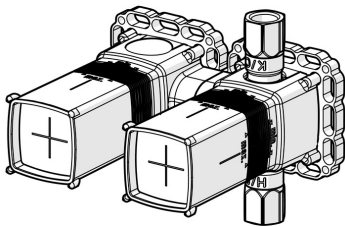

## Technical data

### Flow properties


Flow-rate at 3 bar **21.6 l/min**

### Technical properties


DN-size (nominal dimension) **DN15**  
 Hot water supply **max. +80°C**  
 Working pressure **1-10 bar**  
 Connection size **G1/2**  
 Material **Brass**

### Regulations

EN standard **EN 817**

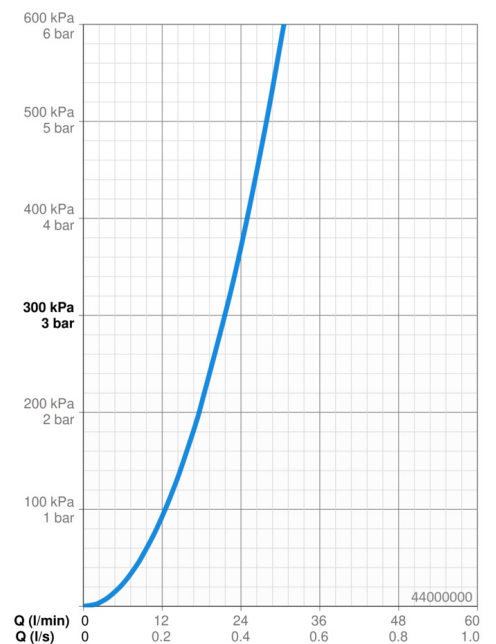

## Spare parts

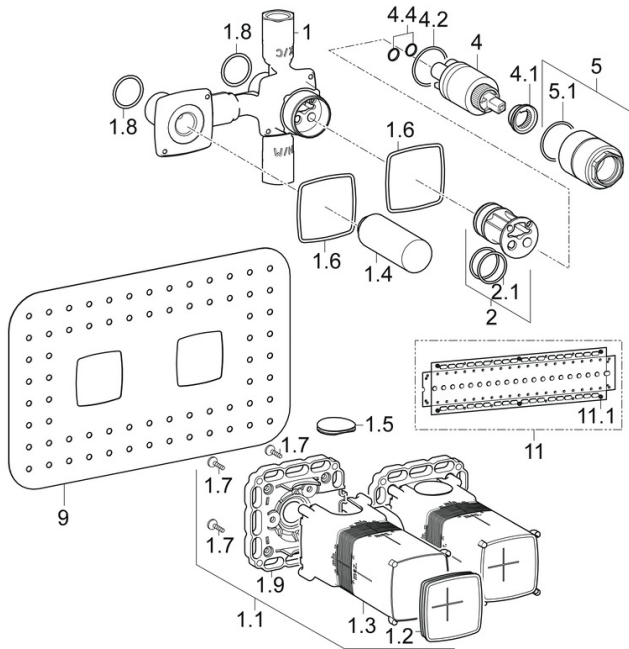

### SP44000000

	Name	Code
1.1	Installation box Discontinued	59913683
1.6	Gasket	59913685
1.8	O-ring, d 25x2.5	59905053
2	Adapter	59913686
2.1	O-ring, d 25.12x1.78 Discontinued	59913687
4	Cartridge, 3.5 Classic	59913075
4.1	Temperature adjustment limiter	59912325
4.2	O-ring, d 28.24x2.62 Discontinued	59912590
4.4	O-ring, d 10.10x1.60 Discontinued	59905072
5	Screw sleeve, M38x1	59912115
9	Gasket, 280x180	59913684
11	Assembling plate	44050000
11	Assembling plate	44050100
11.1	Screw set Discontinued	59913706
N.I.	Key, SW30/34	59912108
N.I.	Raising kit, 20 mm	59913590
N.I.	Adapter	59913826