

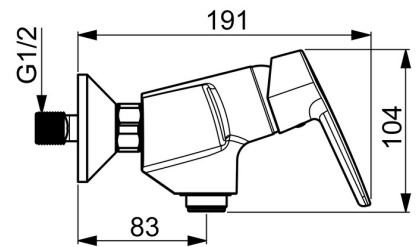


EAN: 4057304002922  
[static.hansa.com/514501930067](https://static.hansa.com/514501930067)

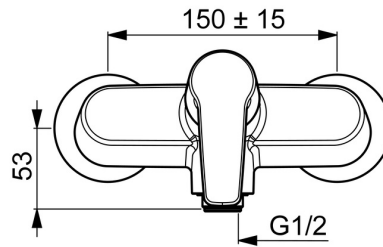

- Shower solutions
- Single-lever
- Wall mounted
- Chrome
- Hot/Cold symbols, Single operating lever/handle
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable), The housing of the fittings conducts minimal heat
- $\varnothing$  35 mm ceramic eco cartridge for flow and temperature control
- Eccentric coupling(s)



## Technical data

### Flow properties

Eco-flow at 3 bar	<b>7.2 l/min</b>
Flow-rate at 3 bar	<b>16.8 l/min</b>

### Technical properties


DN-size (nominal dimension)	<b>DN15</b>
Hot water supply	<b>max. +80°C</b>
Working pressure	<b>0.5-10 bar</b>
Connection size	<b>G3/4</b>
Installation width	<b>CC150 ± 15 mm</b>
Backflow prevention (EN1717)	<b>EB</b>
Material	<b>Brass</b>

### Regulations

EN standard	<b>EN 817</b>
Noise class	<b>I (ISO 3822)</b>

### Approvals and Declarations

KIWA	<b>K6116/08</b>
DVGW	<b>NW-6506BP0361</b>
ABP	<b>PA-IX 10145/IB</b>
Declaration of conformity	<b>DoC</b>

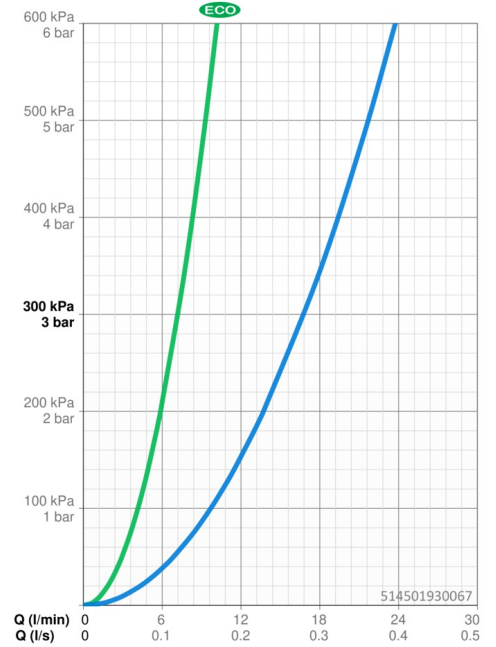

## Spare parts

### SP51450193

	Name	Code
01	Lever	59914417
02	Covering cap, 33x3 mm	59912504
03	Temperature adjustment limiter	59912325
04	Tightening nut, M40x1	1003409V
05	Cartridge, 3.5 Classic	59913075
06	Non-return valve	59905714

