



EAN: 4057304015090
static.hansa.com/51492293

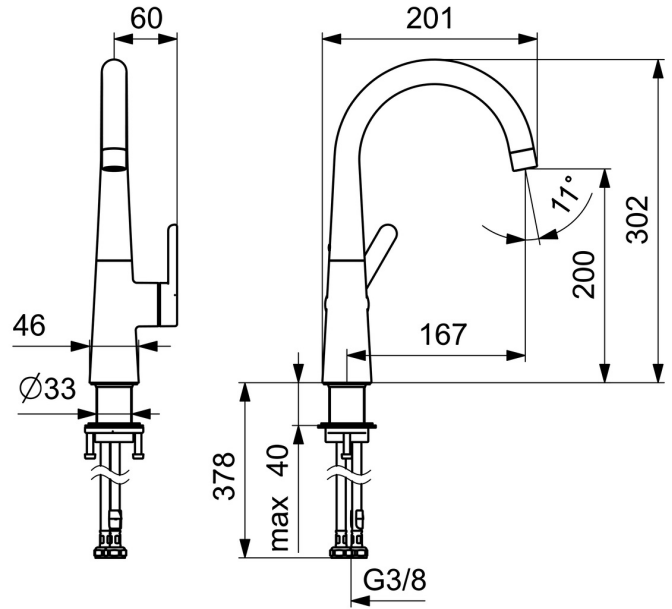

- Washbasin
- Single-lever, side operated
- Deck mounted
- Chrome
- Swivel spout
- PCA® - constant flow rate regardless of pressure variations
- Single operating lever/handle, Hot/Cold symbols
- \varnothing 25 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Without pop-up waste, Without draw-rod opening

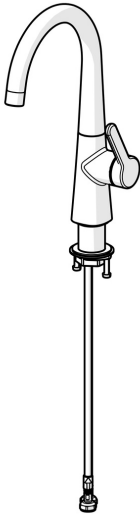

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller) **6.0 l/min**

Technical properties


DN-size (nominal dimension) **DN15**
 Hot water supply **max. +70°C**
 Working pressure **0.5-10 bar**
 Connection size **G3/8**
 Projection **167 mm**
 Backflow prevention (EN1717) **AA**
 Material **Brass**

Regulations


EN standard **EN 817**
 Noise class **I (ISO 3822)**

Approvals and Declarations

DVGW **DW-6506DL0547**
 Declaration of conformity **DoC**

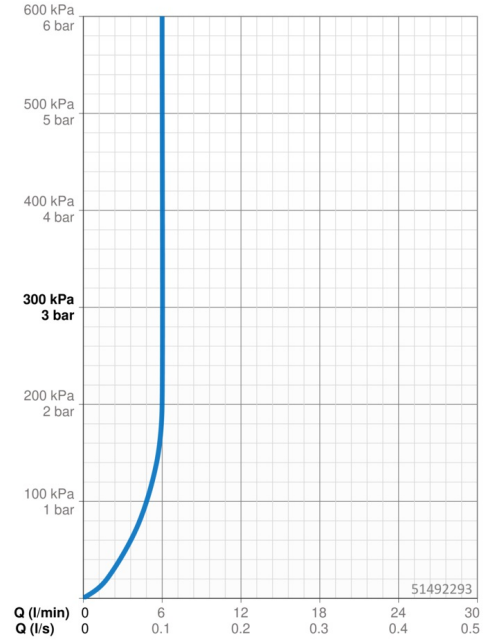

Spare parts

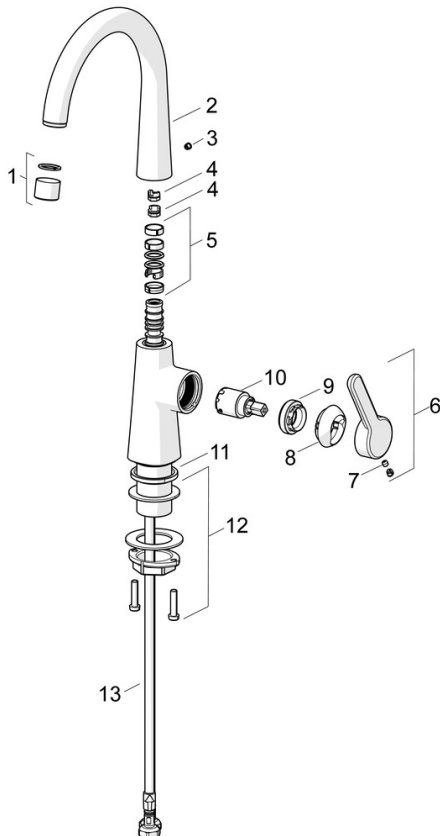

SP51492293

	Name	Code
01	Aerator, M22x1 STD HC PCA, 6 l/min	59914428
02	High spout Discontinued	1007425V
02	High spout	1013626V
03	Cover plug	59913762
04	Spout overturning stopper, 60° /0°	59914264
04	Spout overturning stopper, 120° Discontinued	59914429
05	Sealing kit for spout	59914431
06	Lever Discontinued	59914640
07	Screw, M5x8, SW2.5	59904755
08	Covering cap Discontinued	59914638
09	Tightening nut, M32x1, SW24	59913958
10	Cartridge, 2.5	59913914
11	Bottom seal	59914650
12	Fixing set	59913371
13	Flexible pipe, L=430, M8x1-G3/8 LH Discontinued	59914466