



57102273 HANSASTELA ECO - High washbasin faucet


EAN: 4057304015205 static.hansa.com/57102273






- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- PCA® constant flow rate regardless of pressure variations, Adjustable flow angle
- Single operating lever/handle, Hot/Cold symbols
- Ø 25 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass
- Without pop-up waste





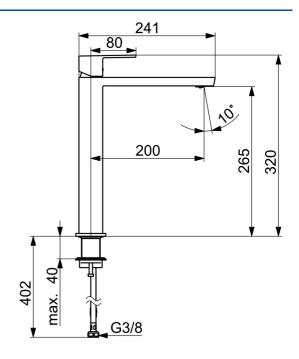





Technical data

Flow properties

Flow-rate at 3 bar (with flow controller) 4.8 l/min **Technical properties** Hot water supply max. +70°C 0.5-10 bar Working pressure Connection size G3/8 200 mm Projection Backflow prevention (EN1717) AA Material Brass Regulations EN standard EN 817 I (ISO 3822) Noise class **Approvals and Declarations** ABP PA-IX 38025/IO Declaration of conformity DoC EPD S-P-06391

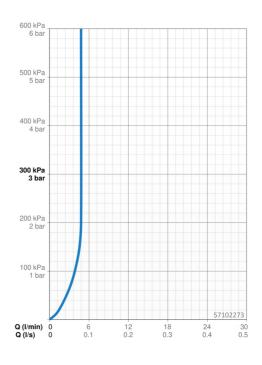

Spare parts

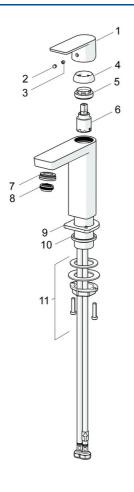

SP57102273

| | Name | Code |
|----|--|----------|
| 1 | Lever | 1006412V |
| 2 | Cover plug | 59913762 |
| 3 | Screw, M5x8, SW2.5 | 59904755 |
| 4 | Covering cap | 59913957 |
| 5 | Tightening nut, M32x1, SW24 | 59913958 |
| 6 | Cartridge, 2.5 | 59913914 |
| 7 | Fitting ring for aerator, M24x1, SW17, (2019-) | 59914744 |
| 8 | Aerator, M24x1 HC SSR-STD | 59914015 |
| 9 | Cover flange | 1006394V |
| 10 | Bottom seal | 59914650 |
| 11 | Fixing set | 59913371 |